

# ACOUSTIC FAR-FIELD PREDICTION USING ROBOTIZED MEASUREMENTS AND THE BOUNDARY ELEMENTS METHOD

CAROLINE PASCAL - ENSTA PARIS  
caroline.pascal.2020@ensta-paris.fr




## INTRODUCTION

Near-field acoustic holography (NAH) has proven to be a useful tool for the identification of sound fields generated by unknown vibro-acoustic sources. The underlying idea behind this method is to extrapolate the sought acoustic quantities based on a set of localised near-field measurements and an assumed wave behaviour model, using an appropriate reconstruction algorithm [1]. We propose an original acoustic far-field prediction procedure, based on autonomous 3D pressure measurements, carried out with a robotic arm, and on a numerical solution derived from the boundary elements method (BEM).

## THE BOUNDARY ELEMENTS METHOD (BEM)

### PROBLEM MODELING, INTEGRAL OPERATOR AND VARIATIONAL FORMULATION

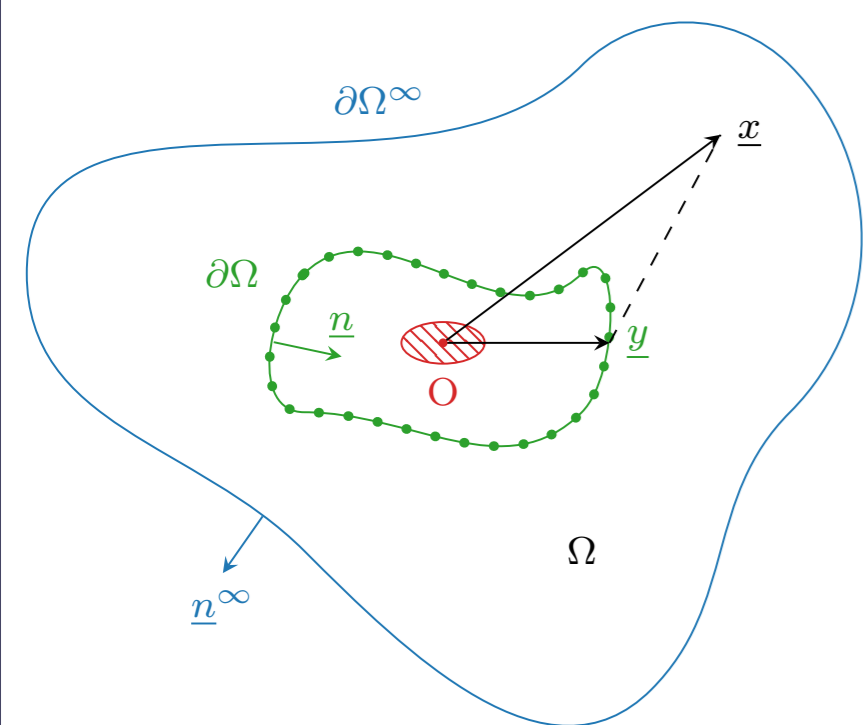

Let  $\partial\Omega$  define a closed surface confining an acoustic source  $O$ , such that the stationary Helmholtz wave equation with the Sommerfeld radiation condition stand for the sought acoustic pressure field  $p$ :

$$\begin{cases} \Delta p(\underline{x}) + k^2 p(\underline{x}) = 0 & \text{in } \Omega \\ p(\underline{x}) = p_0(\underline{x}) & \text{on } \partial\Omega \\ \lim_{\partial\Omega \rightarrow \infty} \left( \frac{\partial}{\partial |\underline{x}|} - ik \right) p(\underline{x}) = 0 \end{cases} \quad (1)$$

Where  $k \in \mathbb{R}$  is the acoustic wavenumber.

Introducing Helmholtz equation free-field Green function,  $G(\underline{x}, \underline{y})$ , [2] shows that the boundary trace of  $p$  can be written using the following integral operator:

$$\exists u : \partial\Omega \rightarrow \mathbb{C}, \forall \underline{x} \in \partial\Omega, p(\underline{x}) = \frac{1}{2}u(\underline{x}) + \int_{\partial\Omega} \left( \frac{\partial G(\underline{x}, \underline{y})}{\partial \underline{n}(\underline{y})} - ikG(\underline{x}, \underline{y}) \right) u(\underline{y}) d\sigma(\underline{y}) \quad (2)$$

Hence, the strong formulation (1) is equivalent to find  $p$  satisfying the weak formulation:

$$\forall v : \partial\Omega \rightarrow \mathbb{C}, \int_{\partial\Omega} \left( p_0(\underline{x}) - \frac{1}{2}u(\underline{x}) \right) v(\underline{y}') d\sigma(\underline{y}') = \iint_{\partial\Omega \times \partial\Omega} \left( \frac{\partial G(\underline{x}, \underline{y})}{\partial \underline{n}(\underline{y})} - ikG(\underline{x}, \underline{y}) \right) u(\underline{y}) v(\underline{y}') d\sigma(\underline{y}) d\sigma(\underline{y}') \quad (3)$$

### NUMERICAL RESOLUTION AND CONVERGENCE PROPERTIES


Given a triangular and regular mesh of  $\partial\Omega$ , and using  $P_0$  Lagrange surfacic elements, (3) can be stated and solved as matrix equations, provided that actual information (e.g. measurements) about  $p$  is given at each triangle centroid.

Equation (2) can then easily be used to reconstruct and predict the studied sound field  $p$  at any point of  $\Omega$ , with an  $l_2$  error decreasing as fast as the squared mesh resolution  $h$  [3] i.e. as fast as the number of eventual number of measurements.

Both resolution and prediction steps were implemented using FREEFEM BEM library [5]


## ROBOTIZED MEASUREMENTS

### EXPERIMENTAL SETUP

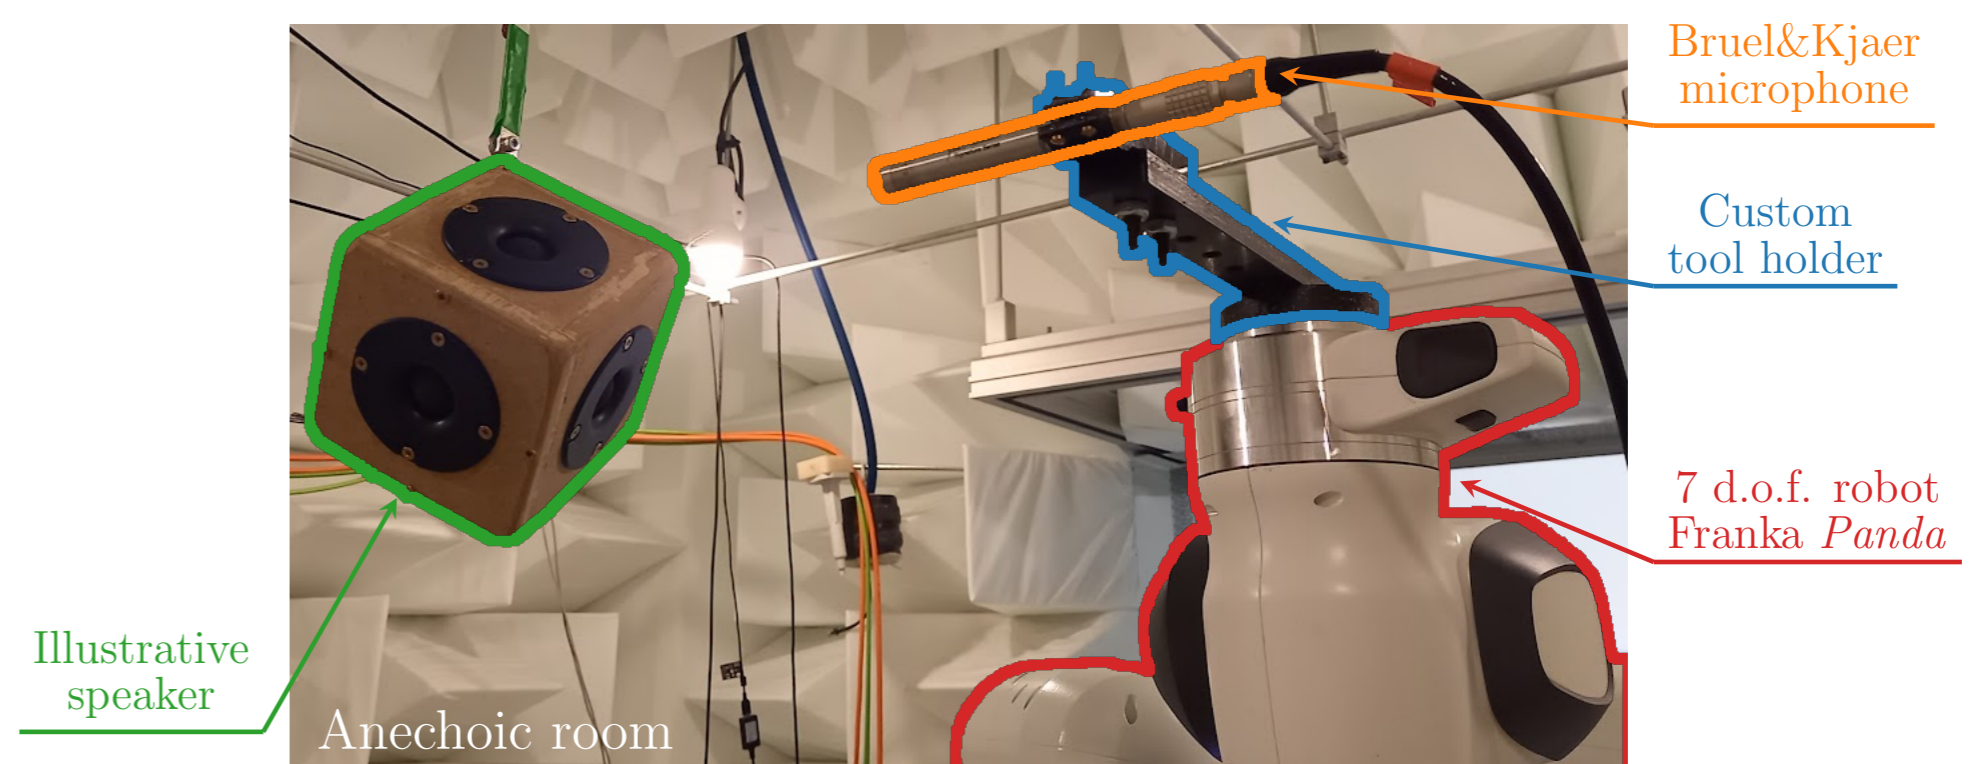

### VALIDITY LIMITS OF THE MEASUREMENTS

#### → Reflections and scattering caused by the robot

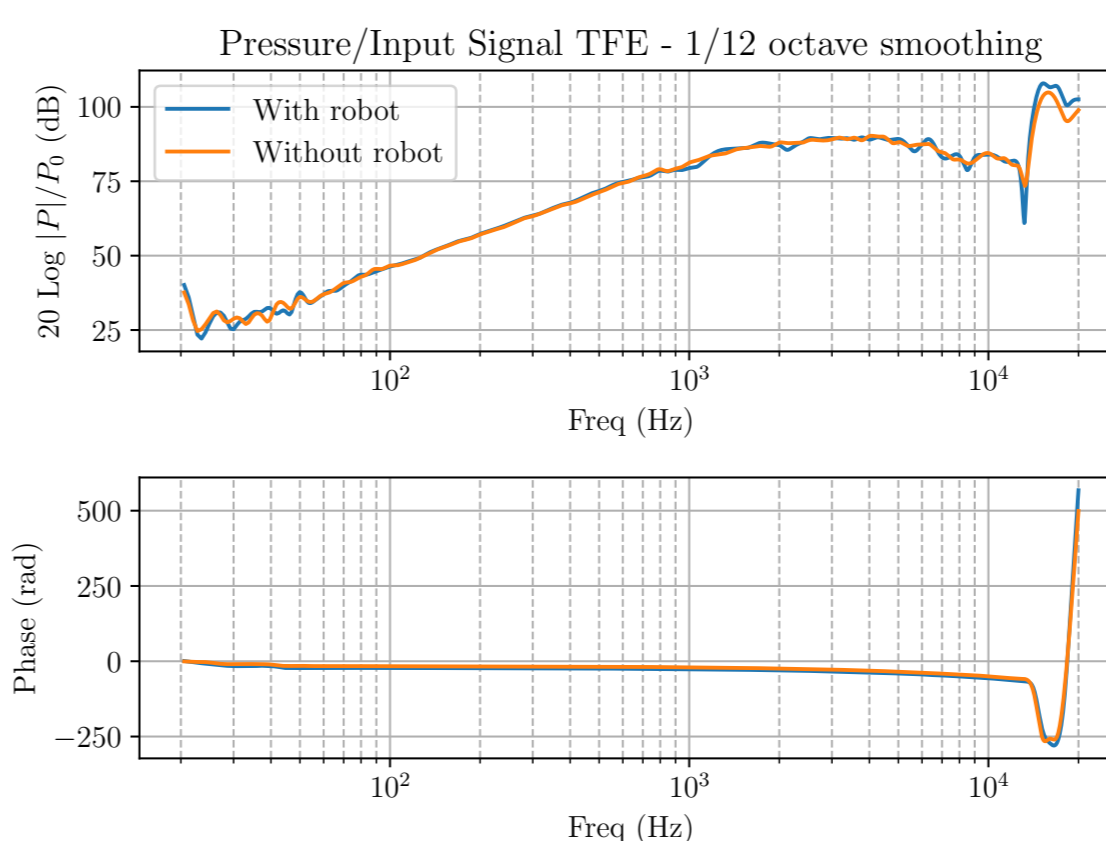

The actual impact of the robot was assessed in 6 control configurations, in which measurements with and without the robot were performed.

The results obtained showed that measurements between 50 Hz and 1000 Hz remain below a 1 dB difference compared to the robotless reference.

All results were obtained using a 10 s logsweep signal sampled at 96 kHz, Welch's method and a 12<sup>th</sup> octave smoothing

#### → Flawed positioning accuracy of the robot


Using the complete calibration procedure presented in [4], the positioning accuracy of the robotic arm was increased to  $\pm 2$  mm, hence allowing measurements to be performed each centimeter with no risk of overlapping.

#### → Sound source repeatability and stationarity

## EXPERIMENTS AND RESULTS


### ACOUSTIC PRESSURE MEASUREMENTS

Acoustic pressure field amplitude (dB) at 500 Hz

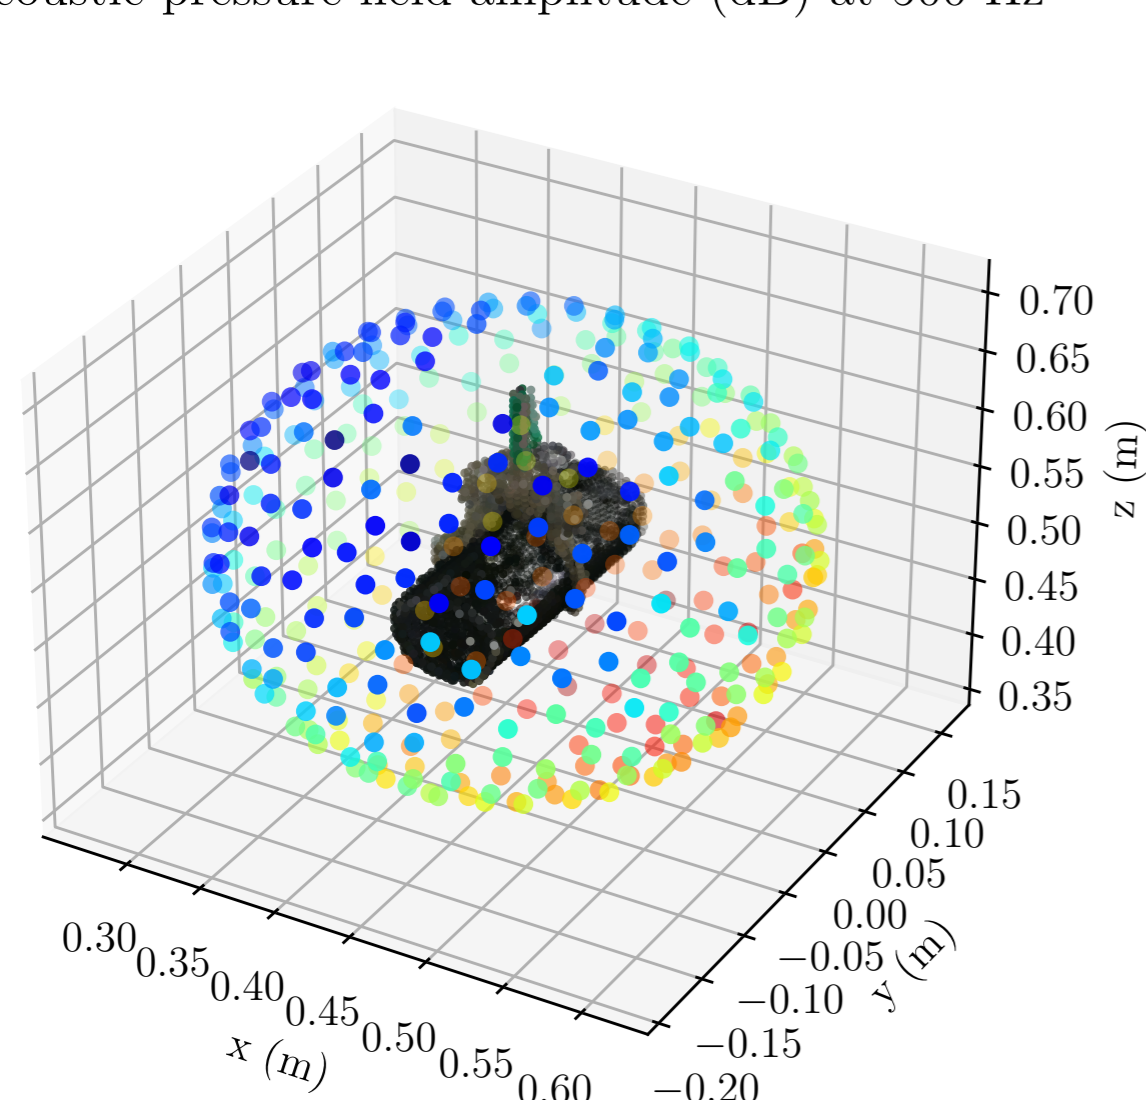


372 measurements carried out with a JBL flip 2 on a spherical mesh of diameter 35 cm and resolution 5 cm (total duration :  $\pm 2$  h)

Acoustic pressure field amplitude (dB)

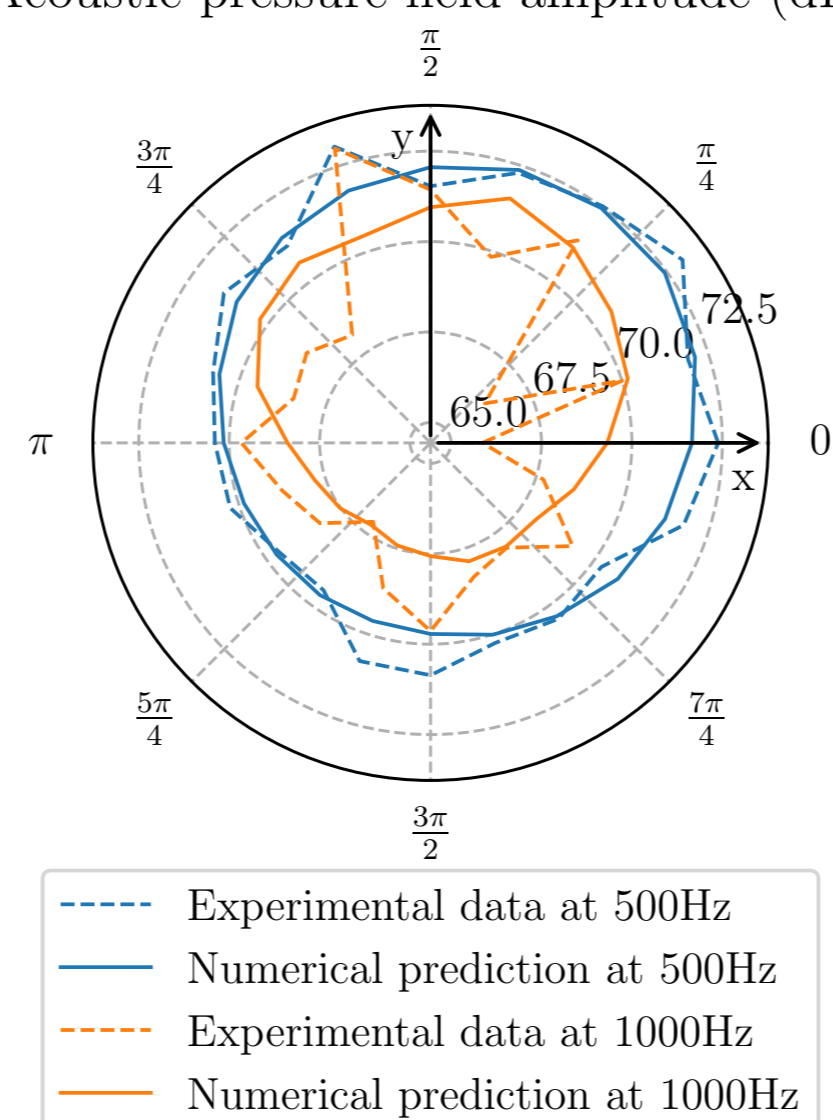

Sampled prediction results obtained on 20 measurements located on a circular mesh of radius 25 cm at  $z = 0$  (left) and detailed data for  $\phi = 0$  (right)

### PREDICTION RESULTS

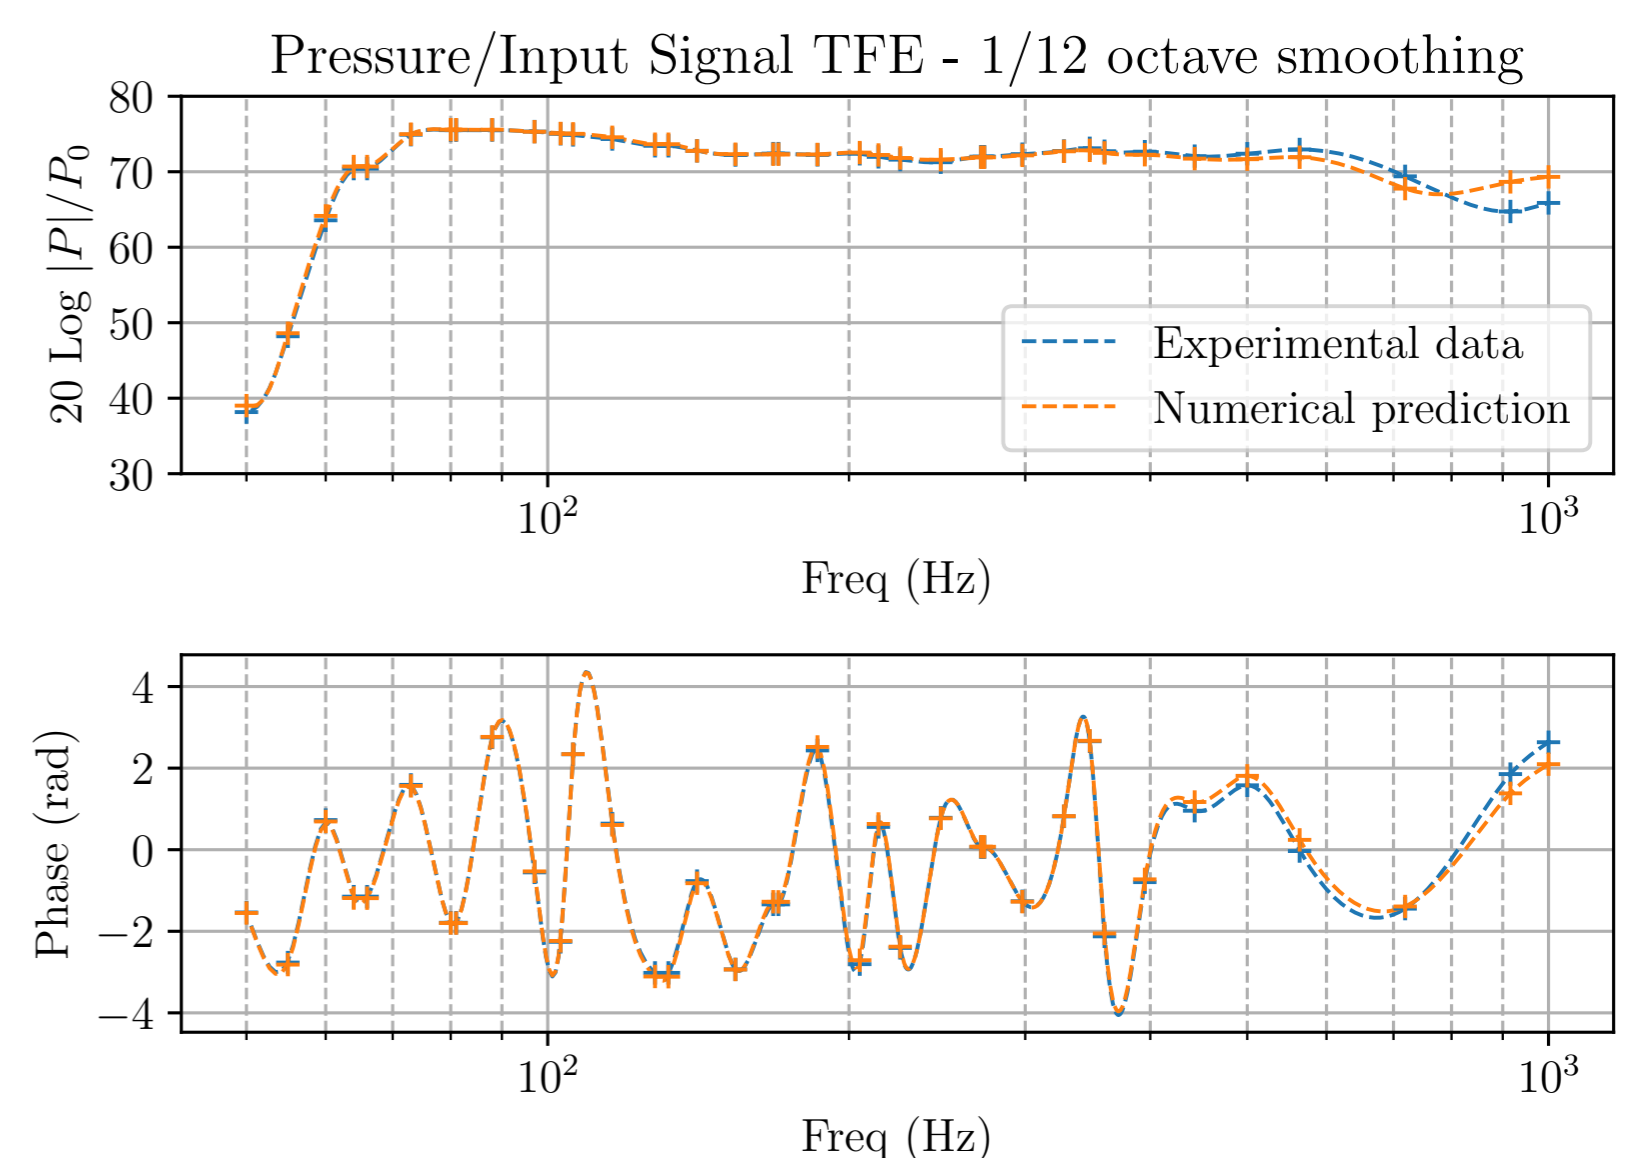

## REFERENCES

- [1] T. Shi, J. S. Bolton, et W. Thor, "Acoustic far-field prediction based on near-field measurements by using several different holography algorithms", *The Journal of the Acoustical Society of America*, vol. 151, n. 3, p. 2171-2180, 2022.
- [2] S. A. Sauter et C. Schwab, "Boundary Element Methods", vol. 39. in Springer Series in Computational Mathematics, Springer, 2011.
- [3] S. N. Chandler-Wilde et al., "Numerical-asymptotic boundary integral methods in high-frequency acoustic scattering", *Acta Numerica*, vol. 21, p. 89-305, 2012.
- [4] C. Pascal et al., "A ROS-based kinematic calibration tool for serial robots: the unburdening of a crucial task", *IROS 2023*, 2023 (Submitted for publication).
- [5] F. Hecht, "New development in FreeFem++", *Journal of numerical mathematics*, vol. 20, n. 3-4, p. 251-266, 2012.

## PERSPECTIVES

- Investigate high frequency prediction errors;
- Implement and evaluate new reconstruction algorithms, such as spacial Fourier transform based methods, equivalent elementary sources decomposition methods, or BEM with  $P_1$  elements;
- Improve and further automate the measurement process : investigate robot induced noise canceling solutions, increase robustness and versatility.